
# DC Contactor

# ZJWH400A-2T DC Contactor

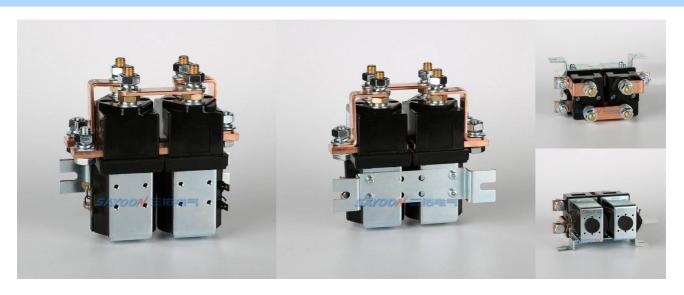

## **USES**

This product have a switching phase contacts, for electric vehicles, telecommunication equipment, engineering machinery, car batteries, electric forklift trucks, trains, ships, electronic control systems such as uninterruptible power supply.

ZJWH	400A	<u>-2T</u>	<u>-S</u>	<u>-C</u>	<u>-M</u>	<u>-</u>	<u>/24V</u>
1	2	3	4	5	6	7	8

- 1 Product type
- 2 Rated current
- 3 Circuit structure: Double coil, double circuit, positive and negative switching
- 4 Auxiliary switch: None Without auxiliary switch; S With auxiliary switch
- 5 Magnetic blowouts
- 6 Mounting bracket type: M Horizontal (default), 2L Two vertical, 4L Four vertical
- 7 Other function codes: I: With suppressor diode, R: With pre-charged resistance ,CO: Continuous , IN:
- 8 Coil rated voltage: 6V,12V,24V,36V,48V,60V,72V,84V,120V,150V,220V etc.

### USE OF THE ENVIRONMENT

	_	_	_	_	_		 		_	_		
		$\mathbf{n}$	$\Box$		$\Box$			UC'	TI.	$\overline{}$		
		ıк			ĸ	HX	R	ш.		. ,	ıv	

Contact lead M10 tightening	ntact lead M10 tightening >20.5 appropriate		3270g	
Coil lead-out torque (N.m)	Coil lead-out torque (N.m) > 0.8 appropriate		10PCS	
Ambient temperature -25~+70°C				
Relative humidity	+20℃ 98%			
Vibration freq. atthe fixed 3G, 1∼50Hz amplitude				
Concussion	(60 $\sim$ 100) time/minute $\sim$			
Altitude	2000m			
Installation direction	Random	Mounting bracket type	M Horizontal (default), 2L Two vertical, 4L Four vertical	
International protection	IP40 (According IEC60947)			

#### ORDER FORM DESCRIPTION


When ordering, please state the following: name, full model, control coil voltage specification, installation frame type, whether with auxiliary contact, order quantity. For example: DC Contactor CZWH400A-2T/24V 100pcs, indicating the load rated current 400A, without auxiliary contact, default mounting bracket, coil control voltage 24V purchase 100pcs. Special voltage specification products, such as user needs can be special order.


# TECHNICAL PARAMETERS

(Version 1.68)

SAYOON Product Type	ZJWH400A-2T
Contact form	Convert the two groups (DPDT)
Coil Rated voltage (DC V)	6V,12V,24V,36V,48V,60V,72V,84V,120V,150V,220V etc.
Contact voltage (DC V)	≤80V
Rated load current of contact 48V circuit (DC-1)	400A
Typical voltage drop across contacts per 100A	≯80mV
The cooling pull-in voltage at (20±5)℃ (V)	≯70%
The cooling drop-out voltage at (20±5) ℃ (V)	<b>≯35%,</b> ≮5%
Working voltage range of 40°C coil	0.8-1.2Us
Drop-out time (n/o contacts to open)	40ms
Pull-in time (n/o contacts to close)	12ms
Maximum bounce time for contact connection	10ms
Maximum bounce time for contact disconnection	3ms
Insulation resistance	20ΜΩ
Electric strength to resist	50Hz/60Hz 1000VAC 1minute
Typical fault currents which can be ruptured	1500A/5ms at 48V DC
Coil power (W)	22-40
Temperature rise of coil (K)	≤80
Temperature rise on outgoing terminal (K)	≤65
Electrical life	20,000 times
Mechanical life	300,000 times
Work specification	Continuous or Intermittent(default)
Contact material	Ag alloy
Load terminal type	M10 Screw
Coil terminal type	6.3mm spade terminals
Auxiliary contact rated load (optional)	2A/48VDC, 5A/24VDC
Normally closed to normally open	14ms

#### LOAD CHARACTERISTIC CURVE

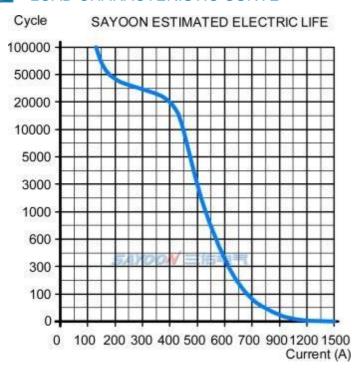

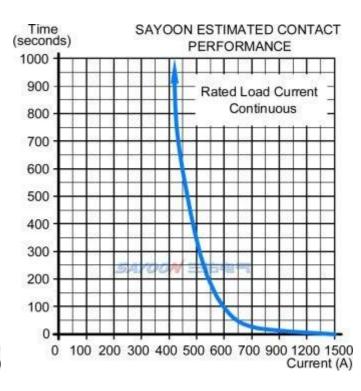


### OTHER TECHNICAL PARAMETERS


Normally open to normally closed	8ms
Testing organization certification	CE,FCC

Note: As regarding to the different using environments of customers which requires different focus of the functions, and in order to improve the comprehensive properties of our products, sayoon may adjust the coil parameters, temperature rise and so on. The above parameters are for reference only, For details, please refer to the guidelines for selection and use of the SAYOON DC contactor.


## INSTALLATION DIAGRAM

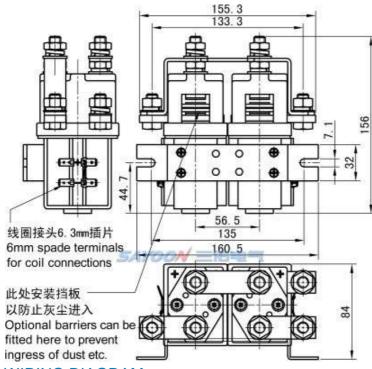

## WIRING DIAGRAM




Paired Single Pole Double Throw Contactor.
1.2.3.4 Contact Terminal
A1. A2.B1. B2 for the two sets of coil terminal



Paired Single Pole Double Throw Contactor for motor reversing 1.2.3.4 Contact Terminal

A1. A2. B1. B2 for the two sets of coil terminal

## TEMPERATURE RISE CURVE

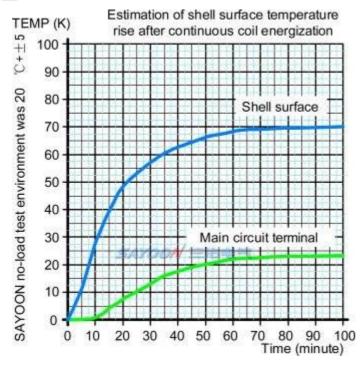

# **FEATURES**

Suitable for electric forklift, battery cars, tractors, excavators, brick machine, cleaning vehicles, automotive air-conditioning, communication power supply, uninterruptible power supply, power supply switches such as electroplating electronic control system control circuit, has the advantages of small volume, large load capacity, long service life, easy maintenance and other characteristics, welcomed by users. The products in accordance with the standard of the JB2286-78, JB3974-85, YD / 585-92, YD / T512-92 requirements; the plant and related test unit test, meet the standard requirements, the user use for many years, the maximum to meet user needs, quality and reliable.